

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :**H03F 3/60****A1**

(11) International Publication Number:

WO 97/23038

(43) International Publication Date:

26 June 1997 (26.06.97)

(21) International Application Number: PCT/US96/19163

(22) International Filing Date: 2 December 1996 (02.12.96)

(30) Priority Data:

08/574,008

18 December 1995 (18.12.95)

US

(71) Applicant: THE BOEING COMPANY [US/US]; P.O. Box 3707, M.S. 13-08, Seattle, WA 98124-2207 (US).

(72) Inventor: McCANDLESS, Jay, H.; 2213 245th Avenue S.E., Issaquah, WA 98027 (US).

(74) Agent: GARDNER, Conrad, O.; The Boeing Company, P.O. Box 3707, M.S. 13-08, Seattle, WA 98124-2207 (US).

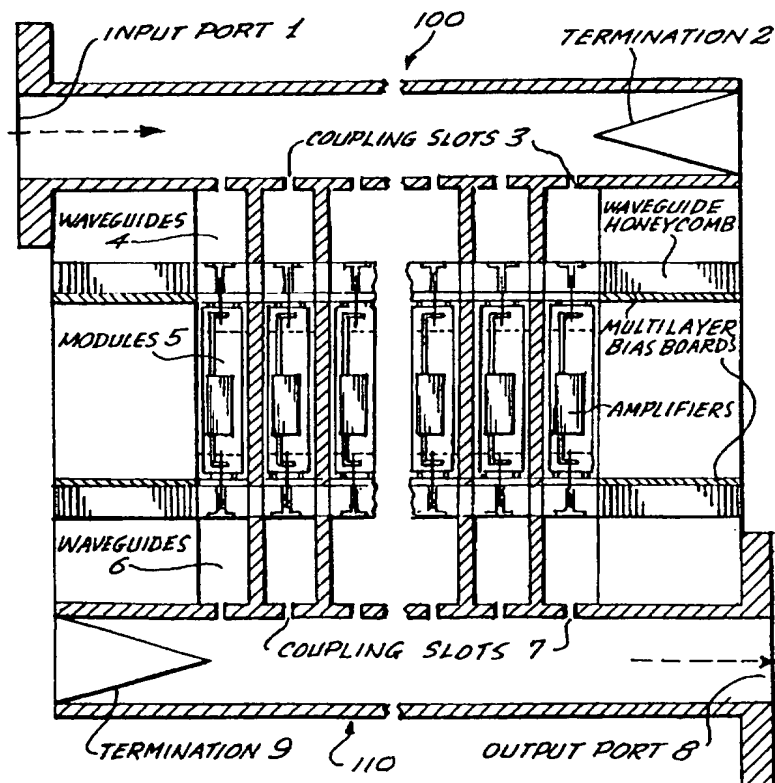
(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: MIST COOLED DISTRIBUTED AMPLIFIER UTILIZING A WAVEGUIDE FEED

(57) Abstract

A mist cooled distributed amplifier utilizing a connectorless module. The amplifier comprises modules that are connected to waveguides in a honeycomb. The RF signals are distributed to and combined from the modules using a distributed waveguide manifold. Cooling is accomplished by forming channels between the modules through which mist is transmitted and collected and condensed at the output end.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NF	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

MIST COOLED DISTRIBUTED AMPLIFIER UTILIZING A WAVEGUIDE FEED**5 RELATED APPLICATIONS**

This application is a continuation-in-part of U.S Patent Application Serial No. 08/326,105 filed October 19, 1994.

FIELD OF THE INVENTION

10 This invention relates to distributed amplifiers and more particularly to a phased array antenna utilized as a microwave distributed amplifier with integral cooling for increased power output.

BACKGROUND OF THE INVENTION**15 PROBLEM TO BE SOLVED**

For many communications and radar applications a high power electromagnetic signal amplifier is required before transmission. At microwave frequencies the amplifier has traditionally been a traveling wave tube amplifier (TWTA). For various reasons such as reliability and biasing it is desirable to use a solid state power amplifier (SSPA) instead. To date, the SSPA's built using a single device have been limited to a few watts at Ku band, and fractions of a watt at K band and above. To get the desired tens or hundreds of watts it is necessary to combine the outputs of many individual amplifiers. The problem to be solved is how to do the power combining.

25

PRIOR ATTEMPTS

The previous solutions can be broken into 3 categories. The first is where the outputs of multiple devices are combined in a single package such as a multi-chip module. The second is where a single amplifier is packaged, typically hermetically, and then multiple packages are combined. The packages will often have a coax or waveguide connector. And the third is a hybrid approach where multiple devices are combined in a hermetic package and then multiple packages are combined using a stripline or waveguide combiner. There are many forms of both.

As higher levels of combining are desired these techniques run into problems. To minimize losses in the combiner it is desirable to keep the transmission lines as short as possible. But at high frequencies the connectors become relatively large and force an inefficient spread out combiner so that eventually increasing the number of amplifiers does not increase the output power.

Even if an efficient large scale combiner could be built there are other issues such as cost and yields which are related. As more and more devices are combined, more and more bias connections are required. These multiple connections dramatically lower the yield and increase the cost of fabrication.

A third major issue is heat dissipation. If the amplifiers are close together to lower the combiner losses then they concentrate the heat dissipated from the individual amplifier. This heat must be dissipated to a heat sink without a large temperature delta or the junction temperature of the active device will be high and shorten the amplifier lifetime.

The patent literature includes U.S. Patent No. 5,327,152 to Kruger et al.; U.S. Patent No. 5,214,394 to Wong and U.S. Patent No. 5,140,335 to

Staehlin et al. Kruger et al. and Wong et al. are similar regarding the combining of microwave signals generated from a planar MMIC (miniature microwave integrated circuit) module arrays. Kruger and Staehlin are similar regarding the use of microwave apparatus with integral cooling networks to
5 control generated thermal excesses.

Kruger et al. relates a phased array antenna comprising a modular structure with integral cooling media passages. Kruger discusses: 1) a planar MMIC phased array with integral cooling, and 2) increased modularity of antenna components for improved assembly/disassembly.
10 Kruger describes a phased array antenna, in contrast to the present microwave amplifier/combiner, 2) uses heat conductive spines to route heat from active components to cooled areas of the structure (Col 6, ln 59), 3) teaches an assembly that is complicated to assemble and maintain (i.e. uses a complicated coaxial interconnect structure to couple each MMIC to their corresponding
15 radiator (Col 6, ln 9) as opposed to the hereinafter disclosed connectorless module), 4) does not utilize the advantages of "mist-evaporative" cooling over liquids.

Wong uses a bi-directional horn to spatially combine planar MMIC module arrays. The bi-directionality allows one side of the MMIC
20 planar array to be accessible for power, control and heat sink connections. Wong teaches the use of a waveguide to realize a microwave power amplifier/combiner. However, unlike the present system 1) Wong's waveguide is heavier, bulkier, and bi-directional (in contrast to the present unidirectional waveguide), 2) Wong dissipates heat using a heat sink (as
25 opposed to the hereinafter disclosed integral cooling media channels).

Staehlin describes a liquid cooled, microwave combiner/manifold, whose physical geometry is such that tight Phase Control

Module (PCM) spacing may be realized. Staehlin 1) combines microwave signals generated from MMIC planar arrays, 2) and utilizes liquid cooling to increase planar array scale and PCM/MMIC densities. However, in contrast to the present system, Staehlin: 1) teaches a waveguide manifold structure for a
5 phased array antenna in contrast to the presently disclosed microwave power amplifier/combiner), and 2) describes the waveguide combiner/manifold as a component and suggests methods of integration (in contrast to the present disclosed modular, liquid cooled, connectorless assembly), 3) does not address the interface means for attaching MMIC/PCM active modules to the
10 combiner/manifold (in contrast to the presently disclosed connectorless module).

U.S. Patent to MacMaster et al., #4,283,685 relates to a radial microwave power amplifier/combiners. MacMaster teaches the combining/amplification of MMIC/PCM generated microwave signals.
15 However, in contrast to the present system, MacMaster 1) combines MMIC/PCM signals from a radial "squirrel cage" array structure (as opposed to the presently disclosed planar array), and 2) uses heat sinks for thermal control (as opposed to the hereinafter disclosed integral cooling media passages).

20

SUMMARY OF THE INVENTION

A liquid cooled, large scale microwave amplifier combiner in the nature of a phased-array antenna structure whose radiating antenna has attached a receiving waveguide to combine the microwave signals. Cooling is
25 accomplished by forming the phased-array honeycomb cells in coolant channels which form a closed loop cooling system. Dielectric mists or fluids

are sprayed or circulated down the channels, cooling the monolithic microwave integrated circuits MMIC that reside in the cells.

BRIEF DESCRIPTION OF THE FIGURES

5 FIG. 1 is a system diagram of the present mist cooled distributed amplifier utilizing a connectorless module;

 FIG. 2 is illustrative of the system of FIG. 1 showing in detail the utilization therewith of mist evaporative cooling;

 FIG. 3 is illustrative of the coolant portion of the system of FIG. 2;

10 FIG. 4 is a top view of an open module; and,

 FIG. 5 is a side cross sectional view of the module of FIG. 4 subsequent to assembly into the distributed amplifier.

DETAILED DESCRIPTION OF THE INVENTION SYSTEM CONCEPT

15 As hereinafter described in detail, those skilled in the art will recognize that the present system efficiently combines thousands of high yield hermetic modules into a large scale amplifier combiner.

METHOD OF ASSEMBLY

20 In the present combined amplifier, modules are placed in a module honeycomb. The Vcc connections are made with elastomeric connectors on each end of the module with the bias coming in on 2 perpendicular multi-layer wiring boards. The RF goes in and out of the package through hermetic end fire transitions into waveguide. The connections
25 are held in place with waveguide honeycombs that bolt on each end of the module honeycomb. The RF is distributed to and combined from the modules using a distributed waveguide manifold, described in detail in U.S. Patent No.

5,276,455 issued January 4, 1994 and assigned to the Boeing Company. Typically similar structural configurations are shown e.g. in U.S. Patent No. 4,939,527 issued July 3, 1990 and assigned to the Boeing Company. See also a Connectorless Module for an EHF phased array antenna by George W. Fitzsimmons et al. in Microwave Journal, pages 114-126, January 1994.

SYSTEM DESCRIPTION

Turning now to Figure 1 a waveguide bar 100 with an input on one end 1 and a termination 2 on the other end is seen. Approximately every half wavelength there is a slot 3 in the wall of the waveguide 100 and each slot 3 feeds a perpendicular waveguide 4. This row of waveguides feed a row of modules 5 which in turn feed another row of waveguides 6 which in turn feed slots 7 in combiner waveguide 110. Combiner waveguide 110 has output 8 and termination 9 reversed to form the basic distributed amplifier. These basic distributed amplifiers can then be considered the modules in a next level up distributed amplifier 120 as shown in Figure 2, forming a 3D honeycomb structure with a 2 level waveguide manifold 10 on each end.

Cooling is accomplished by forming channels between the modules in module honeycomb 11 as shown in Figure 2. The channel size must be small at MMW (millimeter wavelengths) frequencies where the element to element spacing is small. Mist is sprayed down the channel with a nozzle 12, picks up heat by evaporation, and then is collected and condensed at the other end 13. Mist can be sprayed down channels as narrow as 0.030" high. The present system has potential capabilities for generating up to 500 watts at 35 GHz and up to 60 watts at 95 GHz.

Figure 4 shows a top down view of an open module. The amplifier chip has symmetrical RF input and output transmission lines. The

micorstrip lines are transitioned to slot transmissions lines on the bottom of the package. In the process of transitioning to slot line the RF signal are carried in and out of the module under a hermetic seal ring. The slot transmission line feeds a dipole that launches a wave into the input and output waveguides.

- 5 After the amplifier chip is assembled into the package a metal lid is hermetically attached to the seal ring, forming a hermetic enclosure for the amplifier chip.

The bias and any required control signals are brought into the module by edge contacts on the module carrier. The DC and control is carried
10 inside the package by hermetic metal vias, and then routed to the amplifier chip by traces. The connection between the DC contacts on the module carrier and the MLWB is made by an elastomeric connector that is held in a pocket defined by the ceramic substrate, the module carrier and the cut out in the module honeycomb. An elastomeric for each module is dropped into the
15 pocket during assembly. The MLWB is placed on the module honeycomb and then the pressure plate and waveguide honeycomb are bolted on. The MLWB compresses the elastomerics and thus makes the connection between the module and the MLWB by embedded wires in the elastomeric.

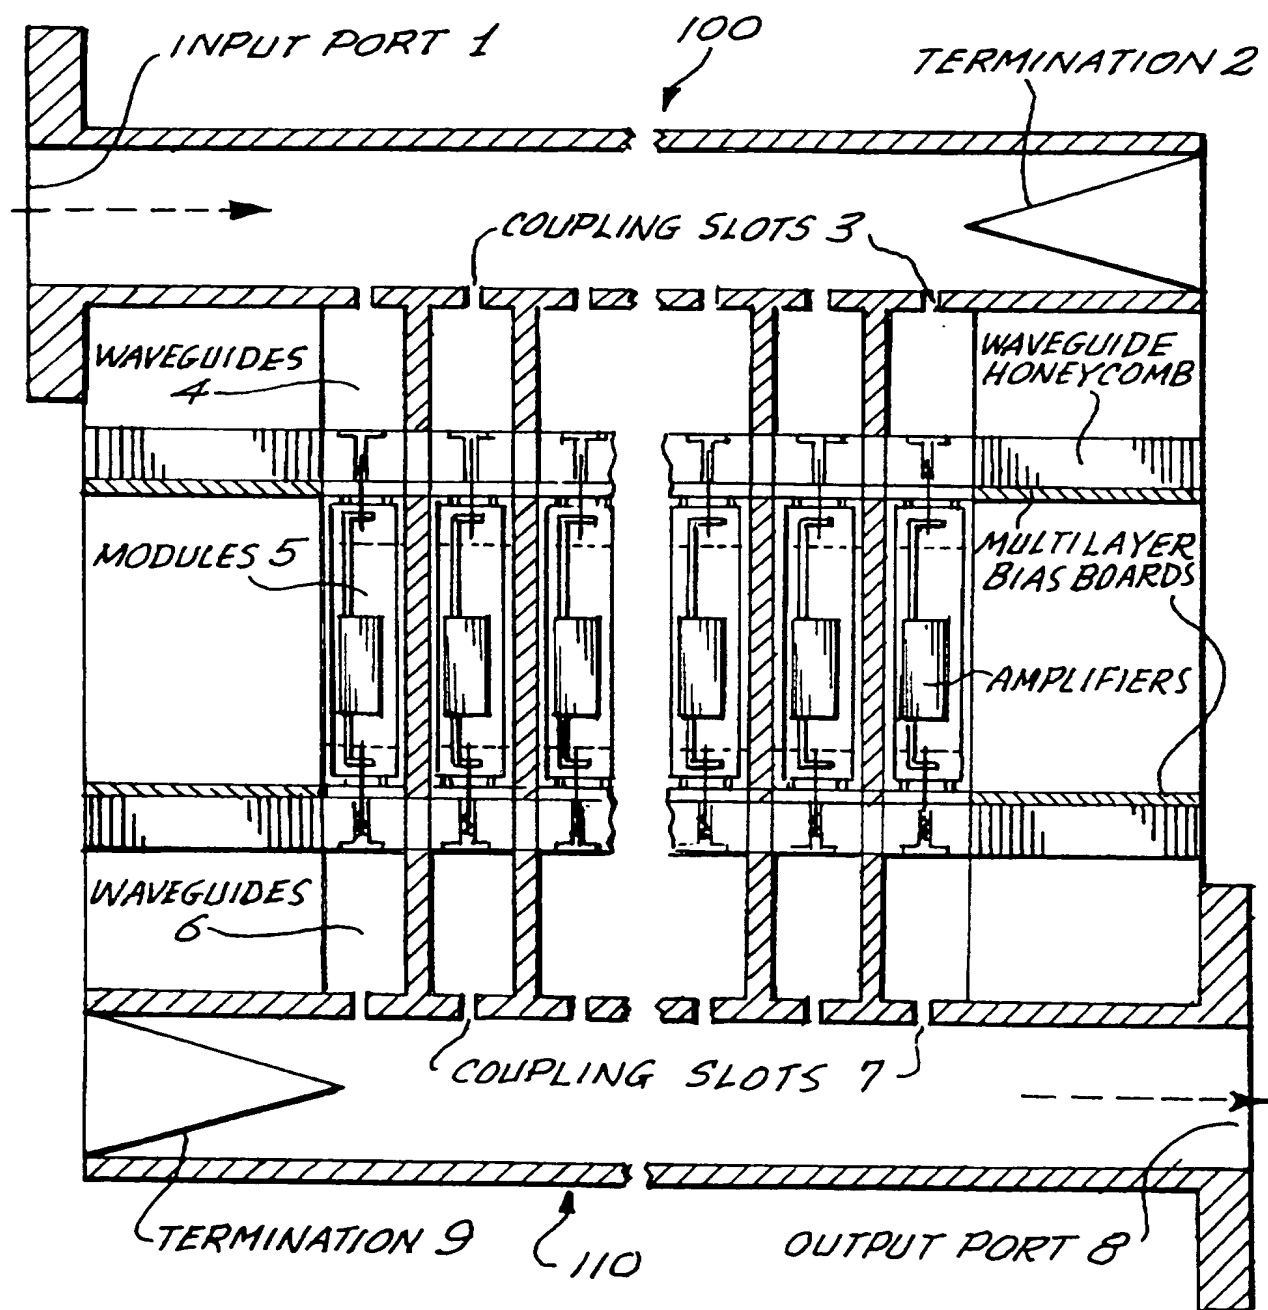
Figure 6 shows a side cross sectional view on the module after it
20 has been assembled into the distributed amplifier. The compressed elastomeric is shown in its pocket. The ceramic substrate is shown extending into the waveguide, butting against the dielectric waveguide element. The module is held in the module honeycomb with a module retainer. The retainer keeps the module from rattling and also assures good thermal contact between
25 the module carrier and the module honeycomb.

The present system concept includes configurations where the power dissipated is sufficiently low such that conduction to a heat sink would

be adequate and therefore the mist-evaporative cooling apparatus would not be required. Those skilled in the art will further recognize different ways to implement a hermetic transition in and out of the package, as well as other types of combiners such as stripline, frequency permitting.

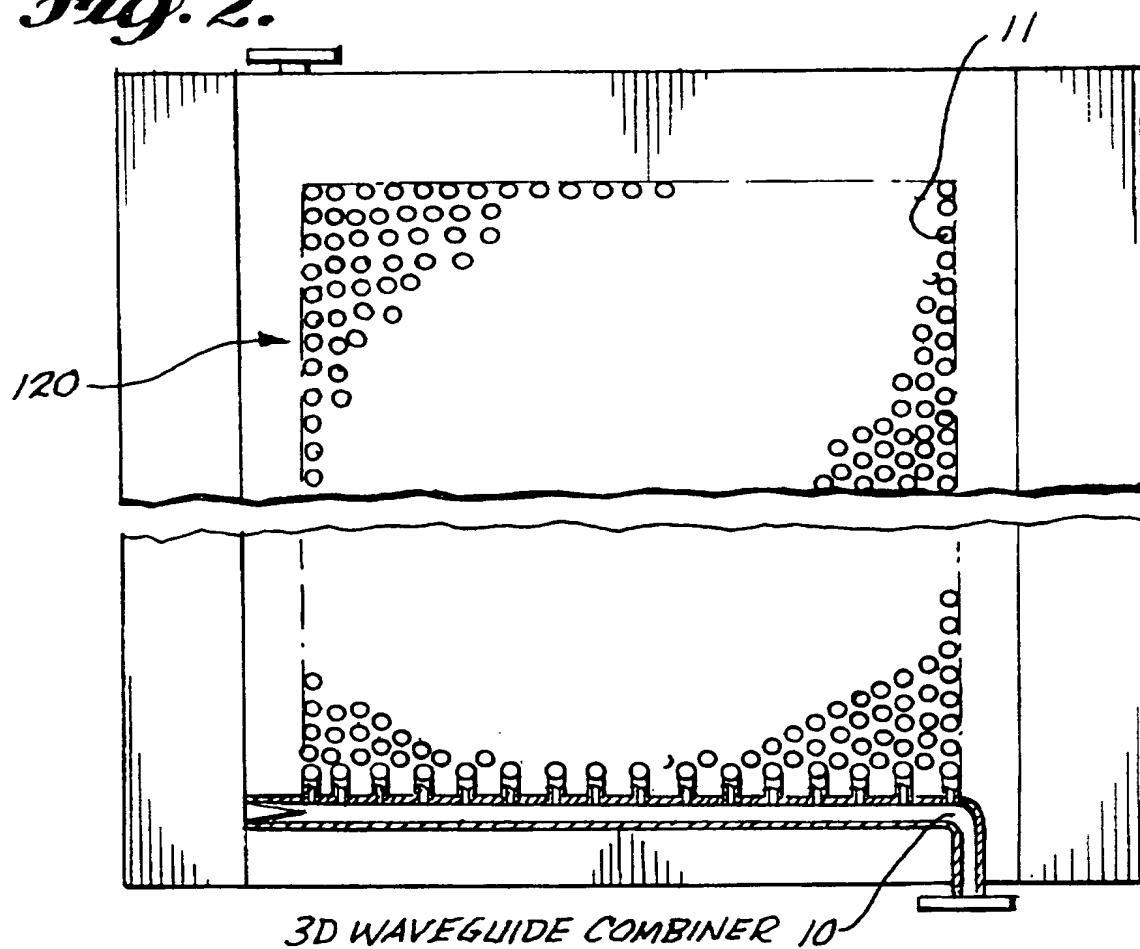
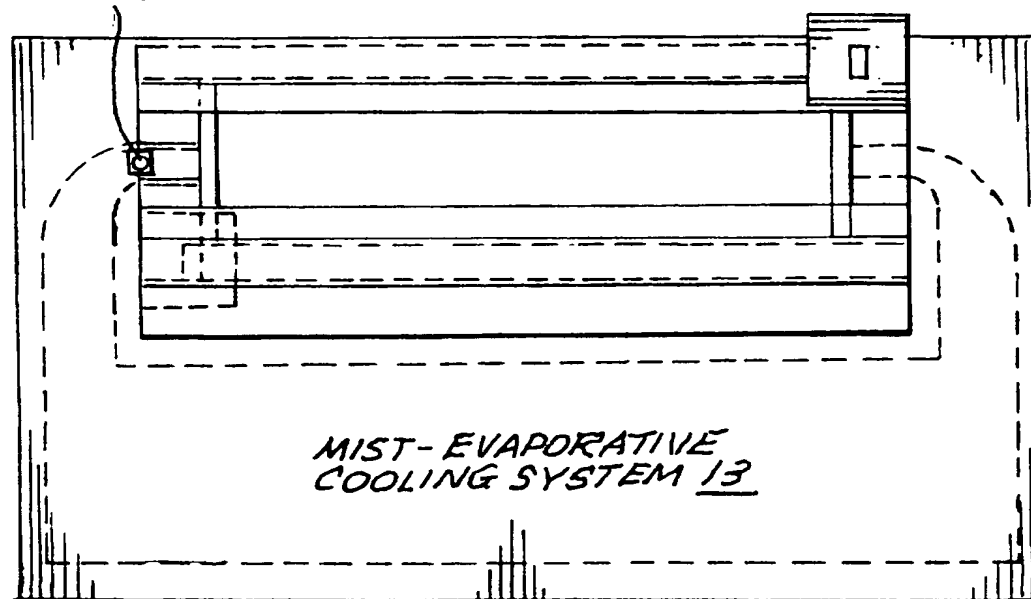
What is claimed is:

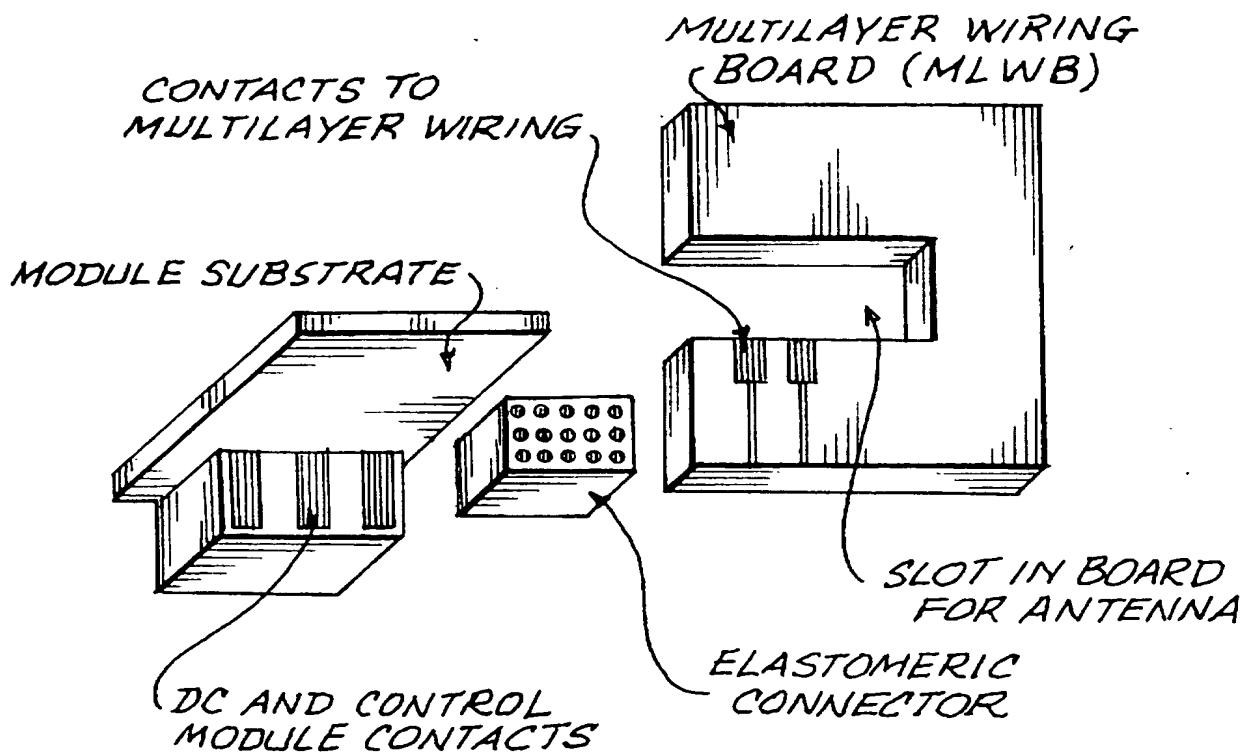
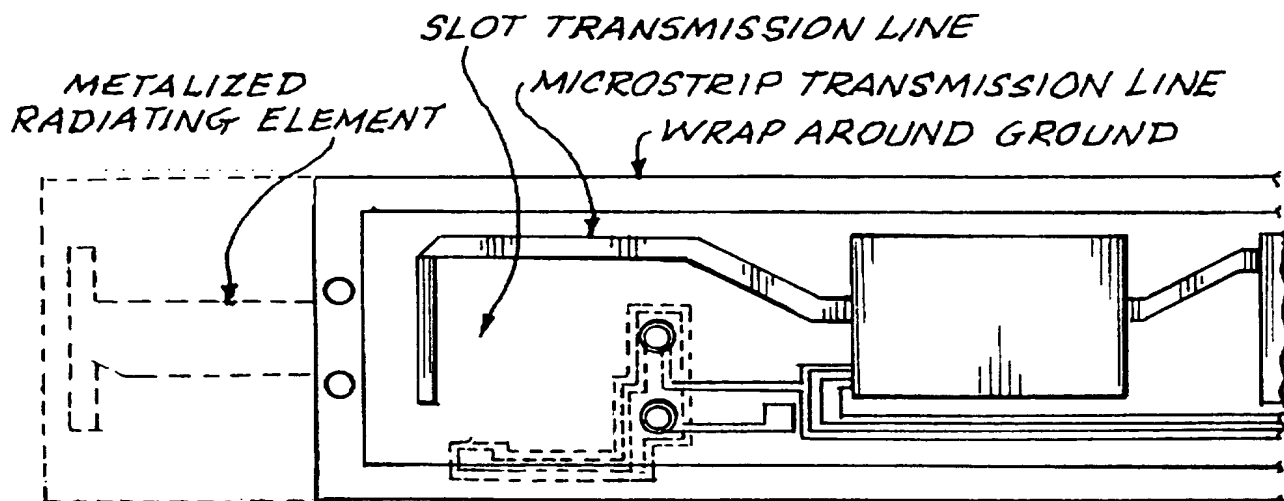
1. A microwave power amplifier comprising in combination: a plurality of phased array honeycomb amplifier cells; said plurality of phased array honeycomb amplifier cells having a plurality of integral coolant channels forming a closed loop cooling system; a distributed waveguide manifold for coupling radio frequency signals to said plurality of phased array honeycomb amplifier cells; and,
a distributed waveguide manifold coupled to said plurality of phased array honeycomb amplifier cells for combining amplified radio frequency signals from said plurality of phased array honeycomb amplifier cells; and
wherein said plurality of phased array honeycomb amplifier cells are mechanically DC connected to a DC power distribution board utilizing compressive mechanical means comprising an elastomeric connector, and
where the RF signal is capacitively coupled in and out of the amplifier cells so that all RF and DC connections are made simultaneously with the mechanical assembly of the two distribution manifolds.
2. The microwave amplifier according to claim 1 wherein said elastomeric connector is held in a pocket by a ceramic substrate.

*Fig. 1.*

1/4

SUBSTITUTE SHEET (RULE 26)

Fig. 2.*NOZZLE 12**Fig. 3.*

*Fig. 4a.**Fig. 4b.*

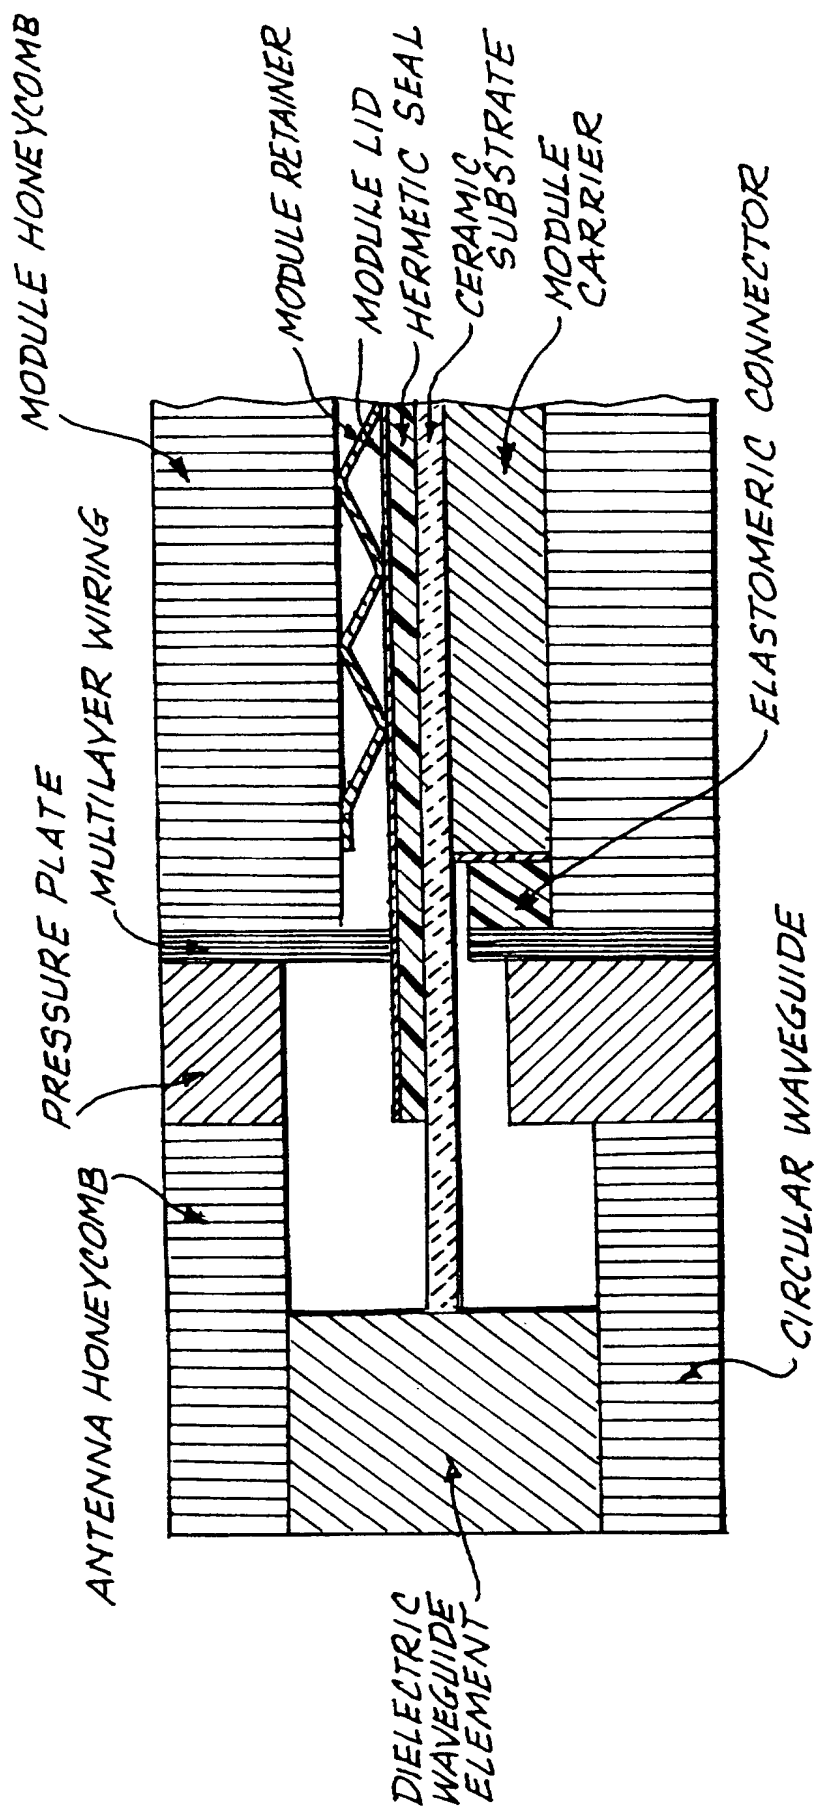


Fig. 5.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/19163

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03F3/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 327 152 A (B. KRUGER ET. AL.) 5 July 1994 cited in the application see column 4, line 57 - column 5, line 21; figure 2 see column 5, line 56 - column 6, line 8; figure 5 ---	1
A	US 5 218 322 A (R. ALLISON ET. AL.) 8 June 1993 see column 3, line 3 - line 58; figure 1 ---	1
A	US 5 140 335 A (J. STAEHLIN ET. AL.) 18 August 1992 cited in the application see column 4, line 59 - column 5, line 12; figure 3 ---	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

12 May 1997

Date of mailing of the international search report

29.05.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Butler, N

INTERNATIONAL SEARCH REPORT

national Application No
PCT/US 96/19163

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 276 455 A (G. FITZSIMMONS ET. AL.) 4 January 1994 cited in the application see column 20, line 45 - line 68; figure 7 -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/19163

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5327152 A	05-07-94	NONE	
US 5218322 A	08-06-93	AU 3566493 A	14-10-93
		CA 2088624 A	08-10-93
		EP 0565053 A	13-10-93
		JP 6045850 A	18-02-94
US 5140335 A	18-08-92	NONE	
US 5276455 A	04-01-94	US 5488380 A	30-01-96